

# GOODYEAR<sup>®</sup>

## 2011 AIR HOSE & REEL PROGRAM





## Retractable Air Hose Reels

- Professional Grade All-Steel Construction
- Heavy Duty Dual Arm, 4-Roller Hose Guide
- 12-Position Ratchet Gearing Locks Hose at Any Length

Item	Description	Packaging	Cs	Wt
46731	3/8" x 50' Retractable Air Hose Reel	COLOR BOX	1	39.7
46741	1/2" x 50' Retractable Air Hose Reel	COLOR BOX	1	47.5

**3/8" x 50'**  
**250PSI**  
WORKING PRESSURE



**1/2" x 50'**  
**250PSI**  
WORKING PRESSURE



**GOODYEAR**  
OFFICIAL LICENSED PRODUCT

93-14408-52798

## Rubber Air Hose

- Solid Brass End Fittings
- Spiral Synthetic Yarn Reinforcement
- Abrasion-Resistant Rubber Outer Jacket
- Bend Restrictors Prevent Kinks Near End Fittings

Item	Description	Packaging	Cs	Wt
46504	3/8" x 25' (250 PSI) Rubber Air Hose	COLOR SLEEVE	4	16.1
46505	3/8" x 50' (250 PSI) Rubber Air Hose	COLOR SLEEVE	4	30.2
46506	3/8" x 100' (250 PSI) Rubber Air Hose	COLOR SLEEVE	5	73.0
46544	3/8" x 25' (300 PSI) Rubber Air Hose	COLOR SLEEVE	5	24.7
46545	3/8" x 50' (300 PSI) Rubber Air Hose	COLOR SLEEVE	4	39.5
46546	3/8" x 100' (300 PSI) Rubber Air Hose	COLOR SLEEVE	2	36.4
46565	1/2" x 50' (300 PSI) Rubber Air Hose	COLOR SLEEVE	4	55.3
46566	1/2" x 100' (300 PSI) Rubber Air Hose	COLOR SLEEVE	2	52.8



Our air hose and air hose reel products are built only with  
**GOODYEAR Rubber Air Hose**



- Solid Brass End Fittings
- Spiral Synthetic Yarn Reinforcement
- Abrasion-Resistant Rubber Outer Jacket

Exceeds



**MEETS RMA CLASS "C" OIL RESISTANCE**

**WORKING TEMP. RANGE  
 -40° TO 190° F**

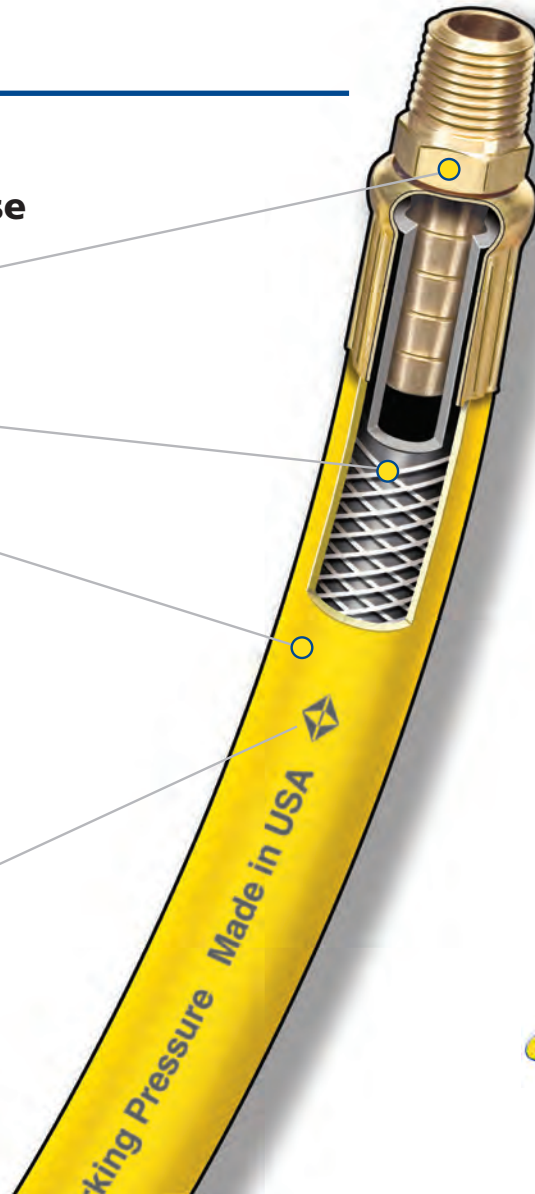

**AIR HOSE  
 100% MADE  
 AND ASSEMBLED  
 IN THE USA**




ITEM #8517

## Air Hose Merchandiser

- Full Color Graphics Around Outside
- Holds up to 20 Air Hoses (3/8" x 50' - 250PSI)
- Can Hold any Goodyear Air Hose Product with 12" Diameter Coil Size
- Ships Unassembled - Minimal Assembly at Retail



### DIMENSIONS

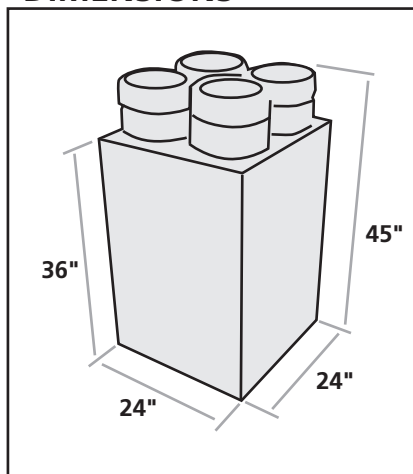

Michigan Industrial Tools • 3707 Roger B. Chaffee Drive SE • Grand Rapids, MI 49548  
Toll-Free: (888) MIT-TOOL • Phone: (616) 243-2443 • Fax: (616) 243-6648 • [www.mit-tool.com](http://www.mit-tool.com)